

8G4D LTP

SPECIFICATIONS

| | |
|------------------------------|-------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 210 Ah |
| Capacity at C/20 | 183 Ah |
| Capacity at C/5 | 153 Ah |
| Weight | 127.5 lbs. (58 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) - 140°F (60°C) |
| Charge Voltage @ 77°F (25°C) | |
| Cycle | 13.8 - 14.6 volts |
| Float | 13.4 - 13.6 volts |
| Vent | Self-sealing |
| Electrolyte | Sulfuric acid thixotropic gel |
| Terminal | T (T975) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

| | |
|--------|---|
| Length | 20.77 (528 mm) |
| Width | 8.44 (214 mm) |
| Height | 10.85 (276 mm) <i>including terminal</i> |

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

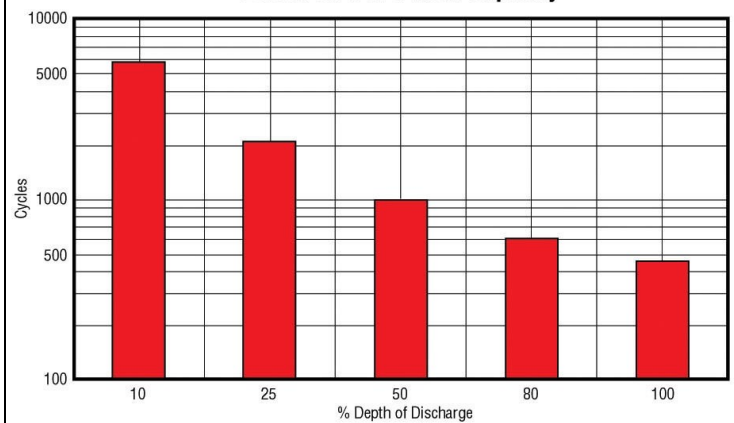

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

