

# LM 26500

## Primary Li-MnO<sub>2</sub> cell

3 V lithium manganese dioxide C-size spiral cell

Saft's LM 26500 cell is ideally suited for applications requiring high energy and long operating life, with stable voltage under high discharge rates in -40°C / +85°C environment.



### Benefits

- High drain/ high pulse capability
- High voltage response, stable during most of the lifetime of the application even after long dormant periods
- High capacity at high current and low temperature
- Low self discharge compatible with long operating life (less than 1% after 1 year of storage at +20°C)
- Superior resistance to corrosion
- Low magnetic signature

### Key Features

- Spiral construction
- Hermetic construction with glass to metal seal
- Stainless steel container
- Integrated safety vent
- Non corrosive electrolyte
- Non pressurized at room temperature
- Restricted for transport (Class 9)
- RoHS and REACH compliant
- Made in USA

### Designed to meet all major quality, safety and environment standards

- Safety: UL 1642 and IEC 60086-4
- Transport: UN 3090 and UN 3091
- Quality: ISO 9001, Saft World Class Continuous program

### Typical Applications

- Utility metering
- Alarms and security
- Tracking systems
- GSM/GPRS communication
- Radio communications systems
- Medical devices

### Electrical characteristics

*(Typical values relative to cells stored for one year or less at +30°C max)*

Nominal capacity (at 150mA +20°C 2.0V cut-off) <sup>1</sup>	7.4 Ah
Open circuit voltage (at +20°C)	3.2 V
Nominal voltage (under 1mA at +20°C)	3.0 V
Nominal energy (at 150mA +20°C 2.0V cut-off)	20.9 Wh
Pulse capability <sup>2</sup>	up to 4.0 A
Recommended maximum continuous current	2.0 A

### Operating conditions

Operating temperature range <sup>3</sup>	-40°C to +85°C
Storage temperatures	
Recommended	+30°C (86°F) max
Allowable <sup>4</sup>	-55°C to +90°C

### Physical characteristics

Diameter (max)	26.0 mm
Height (max)	51.5 mm
Typical weight	61 g
Li metal content	approx. 2.8 g

### Terminations

Available termination suffix	
CNR	radial tabs
3 PF, 3 PF RP, 4PF	radial pins
FL	flying leads
Other configurations upon request	

<sup>1</sup>Dependent upon current drain, temperature and cut-off.

<sup>2</sup>Dependent upon pulse characteristics, temperature, cell history and application. Higher rates are available under certain circumstances.

<sup>3</sup>To maintain cell heating within safe limits. Battery packs may imply lower level of maximum current and may require specific thermal protection. Consult Saft.


<sup>4</sup>Long time storage at high temperature may affect performances. Consult Saft.



**SAFT**

# LM 26500

## LM 26500 dimensions

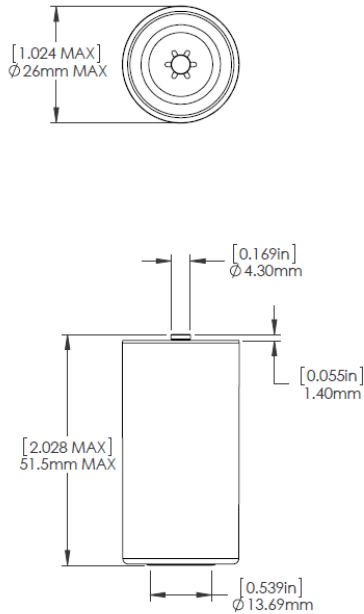


## Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated.


## Warning

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 85°C, incinerate, or expose contents to water.
- Do not solder directly to the cell (use tabbed cell versions instead).
- Do not obstruct venting mechanism.
- Minimum clearance 2 mm (0.08 in) at negative end of cell.


Voltage plateau vs. rate at various temperatures at mid-discharge

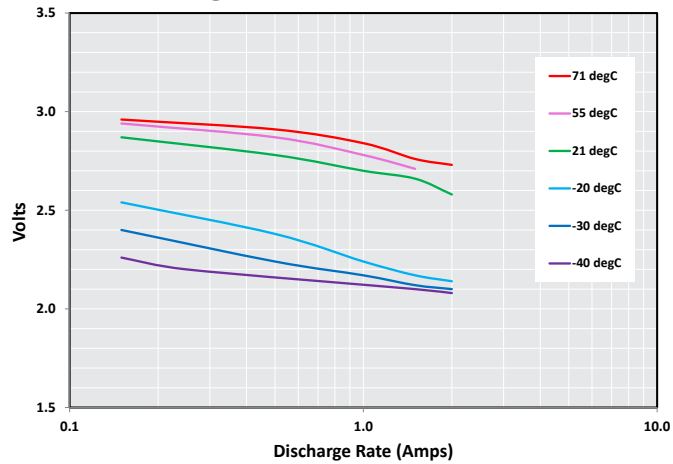

Typical discharge curves for various rates at 21°C

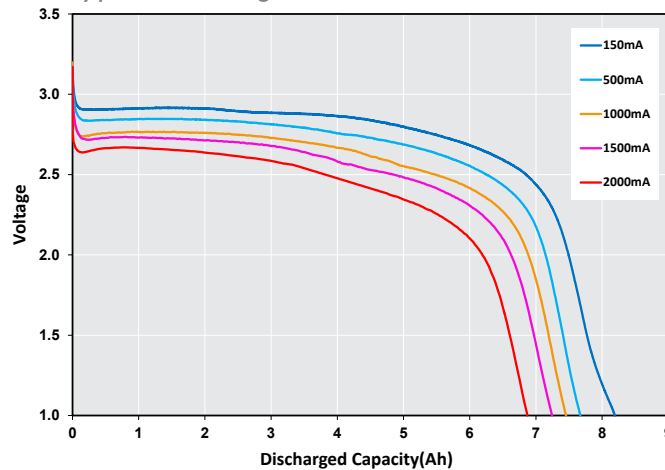

Capacity vs. rate at various temperatures

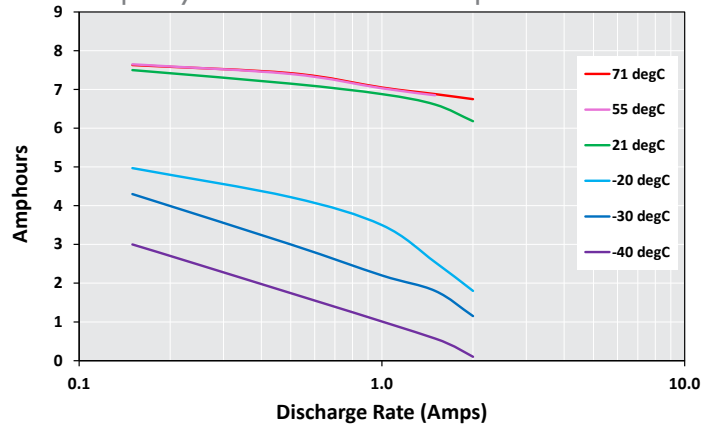

## Saft

12, rue Sadi Carnot  
93170 Bagnolet France  
Tel.: +33 (0)1 49 93 19 18  
Fax: +33 (0)1 49 93 19 69  
www.saftbatteries.com

## Saft America, Inc.

313 Crescent St.  
Valdese, NC 28690 - USA  
Tel.: +1 (828) 874 4111  
Fax: +1 (828) 874 3981  
www.saftbatteries.com

Doc N°31126-2-0315  
Edition: March 2015  
Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.  
Published by the Communications Department  
Photo credit: Saft