



Lithium Cylindrical Cell - CR 123A

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free




REACH compliant



Conflict mineral free

SPECIFICATIONS	
Jauch part number	245719
Nominal Voltage	3V
Nominal Capacity	1600 mAh
Cut-Off Voltage	2V
Continuous Standard Load	10 mA
Max. Continuous Current	1500 mA
Max. Pulse Current	3500 mA
Operating Temperature	-40°C to +70°C *
Weight	Approx. 16.5 g
Chemistry	Li/MnO ₂

Note: Capacity 1600mAh is obtained at standard cc load to 2.0V at 23°C.

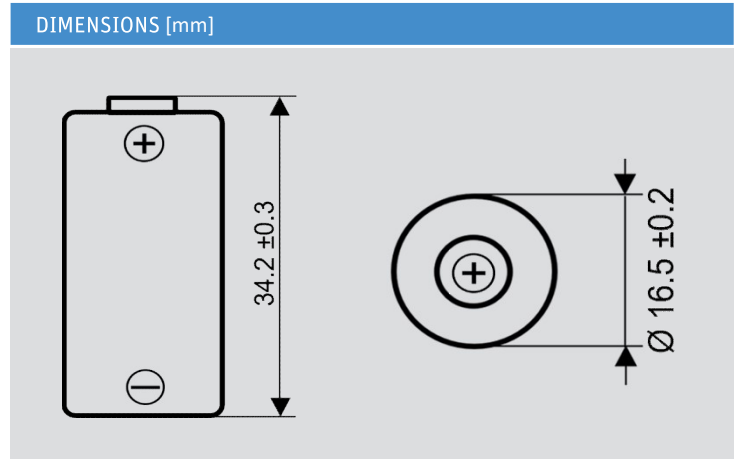

* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.

